

kolektor KS

do celów pogłębionych

Profil kolektora KS 19  
(wariant II)

155,5

R0 ø 400  
L=15.0

Pomownia P1  
(wariant II)

158.30  
(156.49)

153.52 156.40

153.29 156.60  
(156.30) (158.30)

153.04 156.70  
(156.05) (158.20)

152.73 156.50  
(155.74) (158.20)

152.51 156.80  
(155.52) (158.10)

152.37 156.70  
(155.38) (158.10)

152.12 156.50  
(155.13)

151.90 156.90  
(154.91)


ø 200 PVC typ N Gamrat Josto

Typ podłoga C+D

i = 4.5 ‰

ø 200 P1

Station	Distance	Height	Height
P7	0.00	151.90	156.90
S1	50.00	152.12	156.50
S2	105.00	152.37	156.70
S3	135.00	152.51	156.80
S4	184.00	152.73	156.50
S5	254.00	153.04	156.70
S6	309.00	153.29	156.60
S7	359.00	153.52	156.40

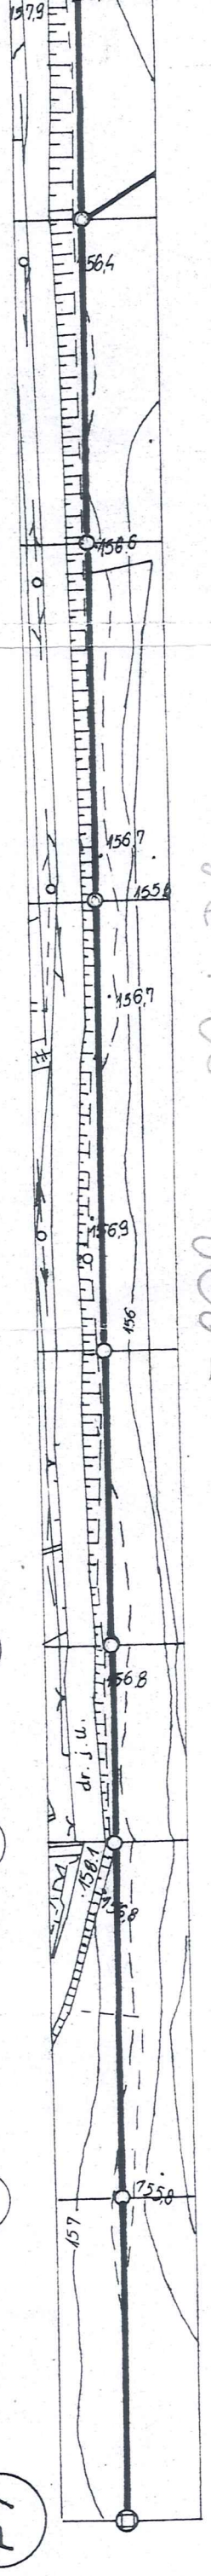

z 309m do 56.40m